





CBP100

Made in Taiwan


| | |
|------------------------------|------------------------------------|
| Electrical Rating | 15A 300VAC |
| Housing Material | Plastic NYLON 66, Black (UL 94V-0) |
| Terminal | Brass, 0.8t Tin Plated |
| Screw | Steel, M3, Nickel Plated |
| Working Temperature | -40°C to +105°C |
| Insulation withstand Voltage | AC2000V at 1 min |
| Insulation resistance | 500MΩ or more at DC 500V |
| Wire Range | 22~12 AWG |
| Max. Torque Value | 10Kg/cm |
| Number of Poles | 2P~32P |
| Pitch (terminal to terminal) | 8.25mm |

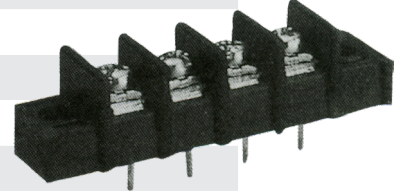



CBP100-01

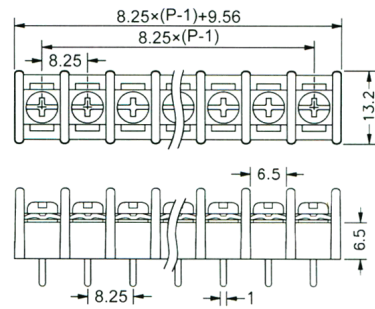


Unit : mm



CBP100-02

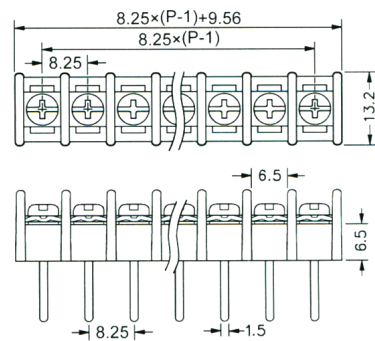

Unit : mm

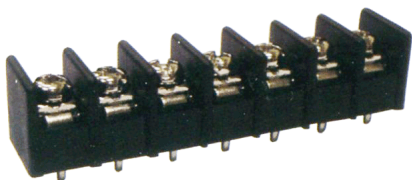

CBP100-03

